


**“P” Series Condensate Pots**


Condensate Pots are designed and configured in six (6) layouts to fit client’s requirements.

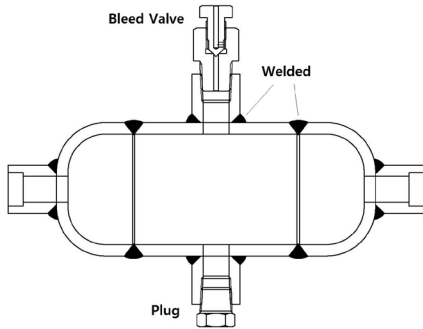

**Pipe Dimensions / Material**  
3 in. or 4 in. Pipe / Stainless Steel

**End Connections**  
Threaded, Ball or Needle Valve

**Configuration Designator**



**Features and Ordering Information**

To order P Series, prefix “P” and build up an ordering number by combining the designators in the sequence below.

**1. Pipe**

Select applicable pipe size, schedule, and material grade.  
Example: P2A4SS-

Size	ANSI	JIS	Schedule	(1)D	Material Grade	(1)D
2 in.	2A	2J	SCH40	4	SS316	SS
3 in.	3A	3J	SCH80	8	SS316L	SSL
4 in.	4A	4J	SCH160	16	SS304	S4
-	-	-	SCH XXS	x	SS304L	S4L

**2. Configuration**

Select applicable configuration.  
Example: P2A4SS-A-


**End Connection Table**

End Connection		Ball Valve		Needle Valve	
End Connection	(1)D	Lever Handle	Butterfly Handle	Bar Handle	Round Handle
Female Thread		BL	BB	NB	NR
1/2 in. NPT	F1	BLF1	BBF1	NBF1	NRF1
3/4 in. NPT	F2	BLF2	BBF2	NBF2	NRF2
1 in. NPT	F3	BLF3	BBF3	NBF3	NRF3
1/2 in. BSPT	F4	BLF4	BBF4	NBF4	NRF4
3/4 in. BSPT	F5	BLF5	BBF5	NBF5	NRF5
Male Thread					
1/2 in. NPT	M1	BLM1	BBM1	NBM1	NRM1
3/4 in. NPT	M2	BLM2	BBM2	NBM2	NRM2
1 in. NPT	M3	BLM3	BBM3	NBM3	NRM3
1/2 in. BSPT	M4	BLM4	BBM4	NBM4	NRM4
3/4 in. BSPT	M5	BLM5	BBM5	NBM5	NRM5
M Tube Fitting					
1/2 in.	A8T	BLA8T	BBA8T	NBA8T	NRA8T
3/4 in.	A12T	BLA12T	BBA12T	NBA12T	NRA12T
1 in.	A16T	BLA16T	BBA16T	NBA16T	NRA16T
12mm	A12M	BLA12M	BBA12M	NBA12M	NRA12M
Flange					
1 in. Class 150 RF	FL1	-	-	-	-
1 in. Class 300 RF	FL2	-	-	-	-

(1)D: Designator

**3. End Connections**

Select an applicable end connections from the end connection table.




Example1: P2A4SS-A-F1  
Example2: P2A4SS-A-M1F1F1F1

**4. Plug**

Add “P” if you need to plug on any port.  
Example: P2A4SS-A-M1F1F1PF1 (Port 3 plugged)

**5. Bleed Valve**



Add “V” if you need a bleed valve on any port.  
Example: P2A4SS-A-M1F1F1PF1V  
(Bleed Valve is on Port 4)